



Nautilus Heat Exchanger

Non corrodible fluoropolymer tank heater or cooler

An internal tank heat exchanger manufactured from fully tested high performance fluoropolymer PTFE-based materials making it ideal for use with nitric, hydrochloric and chromic acids - indeed most known corrosive solutions - up to 100°C.

The Nautilus is supplied with flexible risers and can be used either horizontally or vertically in the process tank.

Output up to 400kW



Used By

- Steel Strip Manufacturers
- Wire & Tube Manufacturers
- Metal Finishers
- Chemical Plants
- Galvanising Industry
- Aerospace Industry
- Chemical Millers

Main Features

- •Reduce process downtime improving efficiency
- •Will not corrode in aggressive acids or chemical solutions
- Suitable for heating or cooling
- •Simple to install and easy to maintain
- Flexible easy fit connections
- Large output range

BRAUDE Products will not corrode

Nautilus Heat Exchanger

Nautilus units are of a modular construction which enables the basic unit capacity to be increased by the fitment of further elements. Heating units can also be 'linked' if really high outputs are required. Operation is normally with saturated steam, hot water or thermal fluid for heating and chilled water for cooling.


The units can be supplied with adjustable hangers for vertical mounting or weightboxes for horizontal mounting.

Technical data

Surface Area	Model	Nominal Heat Ouput	Nominal Dimensions (mm) Risers lengths up to 5m		
M ²		kW	Height	Width	Thickness
0.5 -3.0	300	5 to 60	480	480	49– 148
1.0- 10.0	600	20 to 200	750	820	65 – 314
2.0 - 20.0	900	40 to 400	1065	1000	65 - 322

Heat exchange medium	Maximum Pressure	Maximum temperature	
Steam	3.4 Bar (50 psig)	148℃	
Hot Water	3.0 Bar (45 psig)	115 °C	
Coolant (e.g. Chilled Water)	6.8 Bar (100 psig)	20 ℃	
Thermal Fluid	3.0 Bar (45 psig)	200V	



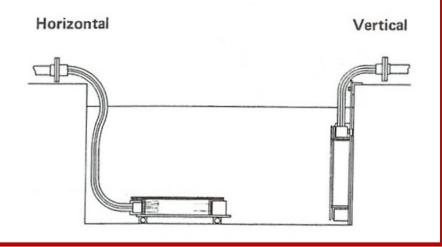

Thermal Process
Equipment Specialists

BRAUDE a trading division of Heatrod Elements Ltd Unit 5, Wellington Business Park, Dukes Ride, CROWTHORNE, Bershire RG45 6LS. UK

Tel: +44 (0)1252 876123 www.braude.co.uk sales@braude.co.uk VAT: UK628867390